

This document provides additional assistance with wiring your Extron IP Link enabled product to your device. Different components may require a different wiring scheme than those listed below.

For complete operating instructions, refer to the user's manual for the specific Extron IP Link enabled product or the controlled device manufacturer supplied documentation.

Device Specifications:

Device Type: Matrix Switcher
Manufacturer: Atlona
Firmware Version: N/A
Model(s): AT-PROHD82M

Version History:

Driver Version	Date	IP Link Compiler	G C Version	Notes
1	12/7/2010	1.4.0	3.0.4	Initial version.

Driver Notes:

Control Commands & States:

Executive Mode	On	Off
Output 1	1-8	
Output 2	1-8	
Power Control	On	Off
Reset	Reset	

*Reset every output to Input 1

Status Available: N / A

MLC62 Supported Commands:

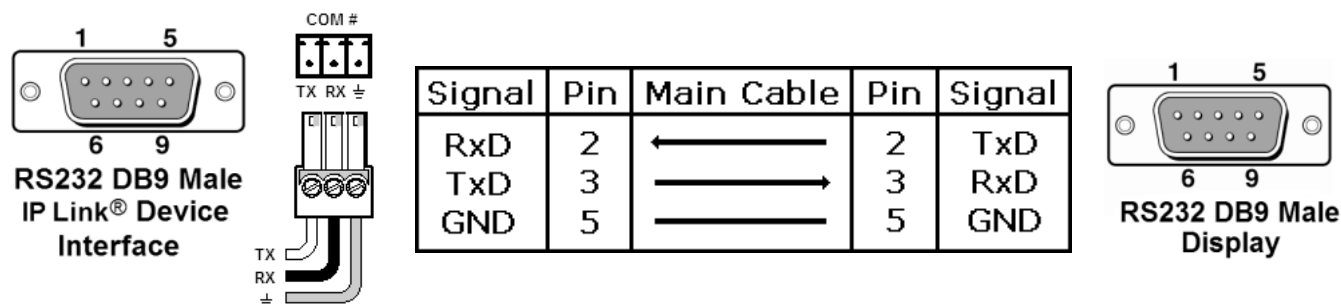
Executive Mode	On	Off
Output 1	1-8	
Output 2	1-8	
Power Control	On	Off
Reset	Reset	

Cable and Adapter Requirements:

F /F Straight cable

Notes for the Device:

Turning the unit System Power Off over RS-232 will extinguish the LED channel display leaving only the Power Switch LED on. The Video and Audio outputs will also mute. While the unit is turned off by RS-232 it will continue to accept and act upon switching commands.

Serial communication:**Port Type:** RS-232**Baud Rate:** 9600**Data Bits:** 8**Parity:** None**Stop Bits:** 1**Flow Control:** None**Pin Assignments Diagram:**

Note: Captive screw connector may also be used as a serial connection.

General Notes: